SIEMENS



Data sheet 3RW5548-2HF04



SIRIUS soft starter 200-480 V 570 A, 24 V AC/DC spring-type terminals Fail-safe

Figure similar

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Failsafe soft starters
product type designation	3RW55
manufacturer's article number	
 of high feature HMI module usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	3RW5980-0CS00
 of communication module PROFINET high-feature usable 	3RW5950-0CH00
 of communication module PROFIBUS usable 	3RW5980-0CP00
 of communication module Modbus TCP usable 	3RW5980-0CT00
 of communication module Modbus RTU usable 	3RW5980-0CR00
 of communication module Ethernet/IP 	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V 	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 400 V at inside-delta circuit 	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 500 V at inside-delta circuit 	3VA2510-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of the gG fuse usable up to 690 V 	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
 of the gG fuse usable at inside-delta circuit up to 500 V 	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1437-2; Type of coordination 2, Iq = 65 kA
 of back-up R fuse link for semiconductor protection usable up to 690 V 	3NC3342-1U: Type of coordination 2, Iq = 65 kA
anaval tachnical data	

General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class according to IEC 61557-12	5 %

(15) (5) (1) (1) (1) (1) (1) (1)	
certificate of suitability	Yes Yes dientudong
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	V
HMI-High Feature	Yes
• is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	
for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
between main and auxiliary circuit	480 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
recovery time after overload trip adjustable	60 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	11/22/2019
product function	
ramp-up (soft starting)	Yes
ramp-down (soft stop)	Yes
breakaway pulse	Yes
 adjustable current limitation 	Yes
 creep speed in both directions of rotation 	Yes
 pump ramp down 	Yes
 DC braking 	Yes
motor heating	Yes
 slave pointer function 	Yes
trace function	Yes
intrinsic device protection	Yes
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
 evaluation of thermistor motor protection 	Yes; Type A PTC or Klixon / Thermoclick
• inside-delta circuit	Yes
auto-RESET	Yes
manual RESET	Yes
• remote reset	Yes
 communication function 	Yes
 operating measured value display 	Yes
• event list	Yes
• error logbook	Yes
via software parameterizable	Yes
• via software configurable	Yes
screw terminal	No
spring-loaded terminal	Yes
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High- Feature communication modules

• Immware update • removable terminal for control circuit • voltage ramp • reside control • combined braking • canalog output • programmable control inputs/outputs • programmable control inputs/outputs • programmable control inputs/outputs • candition monitoring • automatic parameterisation • programmable control inputs/outputs • programmable c		
combined braiking control braiking control control combined braiking conditions condit	• firmware update	Yes
combined braiking control braiking control control combined braiking conditions condit		Yes
combined braking analog output	5	
analog output incorporammable control inputs/outputs incorporation in		***
organization motitoring	G	
euclomatic parameterisation each provided		
automatic parameterisation application wizards alternative nun-down emergency operation mode reversing operation soft starting at heavy starting conditions Power Electronics operational current at 40 °C rated value at 60 °C rated value at		
e application wizards alternative run down emergency operation mode reversing operation soft starting at heavy starting conditions Power Electronics operational current at 40 °C rated value at 40 °C rated value minimum at 45 °C rated value operational current at inside-deflat circuit at 40 °C rated value at 60 °C rated value at 60 °C rated value at 60 °C rated value operating vortage at 60 °C rated value operating vortage at inside-deflat circuit rated value at inside-deflat circuit relative positive tolerance of the operating voltage at inside-deflat circuit relative positive tolerance of the operating voltage at inside-deflat circuit operating power for 3-phase motors at 230 V at 40 °C rated value at 400 °V at inside-deflat circuit at 40 °C rated value at 400 °V at of operating voltage at 160 °C rated value at 400 °V at of operating voltage at 160 °C rated value at 400 °V at of operating voltage at 160 °C rated value at 400 °V at of operating voltage at 160 °C rated value at 400 °V at of operating voltage at 160 °C rated value at 400 °V at of operating voltage at 160 °C rated value at 400 °C at 60 °C rated value at 400 °C at 60 °C rated value at 400 °C after startup by at 50 °C defer startup at 50 °C during startup 7 651 °V yro of the motor protection Electronic, tripping in the event of thermal overload of the motor control reputive tolerance of the control supply voltage control supply voltage at AC at 50 °Lz rated value at 60 °C after startup 40	<u> </u>	
e alternative run-down emergency operation mode e reversing operation yes soft starting at heavy starting conditions Power Electroticis operational current at 40 °C rated value minimum 114 A at 50 °C rated value minimum 214 A at 50 °C rated value eminimum 315 °C rated value eminimum 316 °C rated value 327 °C rated value 328 °C rated value 339 °C rated value 340 °C rate		
emergency operation mode everening operation est starting at heavy starting conditions yes Power Electronics operational current el 40 °C rated value el 40 °C rated valu		
e soft starting at heavy starting conditions soperational current e at 40 °C rated value at 40 °C rated value (at 10 °C rated value) e at 40 °C rated value (at 10 °C rated value) e at 50 °C rated value (at 10 °C rated value) e at 50 °C rated value (at 10 °C rated value) e at 50 °C rated value (at 10 °C rated value) e at 50 °C rated value (at 10 °C rated value) e at 50 °C rated value (at 10 °C rated value) e at 50 °C rated value (at 10 °C rated value) e at 50 °C rated value (at 10 °C rated value) e at 50 °C rated value (at 10 °C rated value) e at 60 °C rated value (at 10 °C rated value) e at 10 °C rated value (at 10 °C rated value) e at 10 °C rated value (at 10 °C rated value) e at 10 °C rated value (at 10 °C rated value) e at 10 °C rated value (at 10 °C rated value) e at 10 °C rated value (at 10 °C rated value) eralative negative tolerance of the operating voltage at 10 °C rated value (at 10 °C rated value) eralative positive tolerance of the operating voltage at 10 °C rated value (at 20 °C rated value) e at 20 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside-delta circuit at 40 °C rated value eral 40 °C at inside rate value eral 40 °C at inside value eral va		
Soft starting at heavy starting conditions Power Electronics operational current		
power Electronics operational current • at 40 °C rated value inimimum • at 60 °C rated value inimimum • at 60 °C rated value inimimum • at 60 °C rated value • at 60 °C rated value • at 60 °C rated value • at 50 °C rated value • at 50 °C rated value • at 50 °C rated value • at 60 °C rated value • at 230 °V at 60 °C rated value • at 230 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °V at 60 °C rated value • at 400 °C ated value • at 400 °C ated value • at 400 °C ated value • at 40 °C ater startup • at 50 °C ater startup • at 50 °C ater startup • at 60 °C		
operational current at 40 °C rated value at 40 °C rated value 570 A at 60 °C rated value 578 A at 60 °C rated value 578 A at 60 °C rated value 578 A at 60 °C rated value 678 A at 60 °C rated value 786 A operating voltage 678 A at 60 °C rated value 786 A operating voltage 678 A at maide-delta circuit rated value 786 A operating voltage 786 A operating voltage 678 A at maide-delta circuit rated value 786 A operating voltage 10 % relative positive tolerance of the operating voltage at inside-delta circuit 786 W operating power for 3-phase motors 8 at 230 v at on "Grated value 8 at 230 v at on "Grated value 8 at 400 v at on "Grated value 9 at 400 v at on "Grated value 9 at 400 v at one operating frequency 7 and to "Grated value 9 at 400 v at one operating frequency 7 and to "Grated value 9 at 40 v "Grater startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 50 °C after startup 10 % 11 W at 5		Yes
• at 40 °C rated value • at 40 °C rated value minimum • at 50 °C rated value • at 60 °C rated value • at 50 °C rated value • at 50 °C rated value • at 50 °C rated value • at 60 °C value value • at 60 °C value value • at 60 °C value value • at 230 °C value value • at 230 °C value value • at 400 °C rated value • at 60 °C rater startup • at 60		
at 40 °C rated value minimum at 50 °C rated value at 60 °C rated value 480 A operational current at inside-delta circuit at 40 °C rated value at 60 °C rated value at 60 °C rated value at 60 °C rated value 796 A operating voltage at at 60 °C rated value at inside-delta circuit rated value at inside-delta circuit rated value at inside-delta circuit rated value relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors at 230 V at 1 mside-delta circuit at 40 °C rated value at 400 V at 40 °C rated value at 400 V at 60 °C rated value at 400 V at 160 °C rated value at 400 V at 160 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value 60 Hz relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency nown insignity tolerance of the operating frequency 10 % relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency 10 % Relative to set le power loss [W] for rated value of the current at AC at 40 °C after startup at 50 °C after startup be 450 °C after startup 410 W 410 W 410 W 410 W 411 W 411 W 411 W 411 W 411 W 411 W 412 W 411 W 412 OF Ord outing startup 412 OF Ord outing startup 413 OF Ord outing startup 414 OF Ord outing startup 415 OF Ord outing startup 416 OF Ord outing startup 417 OF Ord outing startup 418 OF Ord outing startup 419 OF Ord outing startup 410 OF Ord outing startup	•	570 A
at 50 °C rated value at 60 °C rated value 460 A		
e at 60 °C rated value operational current at inside-delta circuit e at 40 °C rated value 987 A 150 °C rated value 987 A 987 A 988 A 998 A 998 A 999 A 99 A 9		
operational current at inside-delta circuit at 40 °C rated value at 50 °C rated value 987 A 873 A 876 A operating voltage 1 rated value 200 480 V relative negative tolerance of the operating voltage relative negative tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit at 40 °C rated value 10 % 150 kW		
at 40 °C rated value at 50 °C rated value 796 A operating voltage rated value 200 480 V relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage tinside-delta circuit 10 % relative positive tolerance of the operating voltage at inside-delta circuit 10 % operating operating operating voltage at inside-delta circuit at 40 °C rated value at 230 V at 40 °C rated value at 230 V at 10 °C rated value at 400 V at inside-delta circuit at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 1 rated value Operating frequency 2 rated value 10 % relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup at 60 °C after startup at 60 °C after startup at 60 °C after startup at 60 °C after startup at 60 °C after startup at 60 °C after startup at 60 °C during startup at 60 °C after s		400 A
at 50 °C rated value at 60 °C rated value rated value at 160 °C rated value relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors at 230 °V at 160 °C rated value at 230 °V at 160 °C rated value at 240 °V at 160 °C rated value at 400 °V at inside-delta circuit at 40 °C rated value at 400 °V at inside-delta circuit at 40 °C rated value at 400 °V at inside-delta circuit at 40 °C rated value be at 400 °V at inside-delta circuit at 40 °C rated value be at 400 °V at 160 °C rated value at 40 °V at 160 °C rated value at 50 °V at 60	•	087 Λ
operating voltage		
operating voltage • rated value • a tinside-delta circuit rated value relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 1 misde-delta circuit at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at 1 misde-delta circuit at 40 °C rated value • at 400 V at 1 misde-delta circuit at 40 °C rated value • at 400 V at 1 misde-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Folk Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 4 rated value Operating frequency 6 the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 60 °C after startup • at 60 °C after startup • at 60 °C during startup • at 60 °C		
• rated value • at inside-delta circuit rated value relative agative tolerance of the operating voltage relative positive tolerance of the operating voltage relative negative tolerance of the operating voltage relative negative tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Coperating frequency 1 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the current at AC • at 40 °C after startup • at 50 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C during startup • at		190 A
e at inside-delta circuit rated value relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors e at 230 V at 40 °C rated value e at 230 V at inside-delta circuit at 40 °C rated value e at 230 V at inside-delta circuit at 40 °C rated value e at 400 V at inside-delta circuit at 40 °C rated value e at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 6 the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC e at 40 °C after startup		200 480 V
relative negative tolerance of the operating voltage relative positive tolerance of the operating voltage relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at inside-delta circuit at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at thiside-delta circuit at 40 °C rated value • at 400 V at thiside-delta circuit at 40 °C rated value • at 400 V at thiside-delta circuit at 40 °C rated value • at 400 V at thiside-delta circuit at 40 °C rated value • at 400 V at thiside-delta circuit at 40 °C rated value • at 400 V at thiside-delta circuit at 40 °C rated value • at 400 V at thiside-delta circuit at 40 °C rated value • Operating frequency 2 rated value • 60 Hz relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency • at 50 °C after startup • at 60 °C after startup • at 60 °C after startup • at 50 °C during startup • at 60 °C during		
relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 140 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value Operating frequency 2 rated value of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C during startup •	relative negative tolerance of the operating voltage	-15 %
relative negative tolerance of the operating voltage at inside-delta circuit relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 10 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value 60 Hz relative negative tolerance of the operating frequency relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative nost in tolerance of the operating frequency ninimum load [%] 10 %; Relative to set le 10 %; Relative to set le 11 W 12 ye was 150 °C after startup 151 W 151 W 151 W 152 ye was 160 °C during startup 162 ye was 160 °C during startup 176 ye at 60 °C during startup 176 ye at 60 °C during startup 176 ye at 60 °C during startup 176 ye of voltage of the control supply voltage control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC 177 your supply voltage at AC 187 ye at 50 Hz rated value 187 ye at 60 °C during control the control supply voltage at AC at 50 Hz relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply		10 %
relative positive tolerance of the operating voltage at inside-delta circuit operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency nower loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 50 °C after startup • at 60 °C during startup • at 50 °C during startup • at 60 °C during startup		-15 %
operating power for 3-phase motors • at 230 V at 40 °C rated value • at 230 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • at 400 V at inside-delta circuit at 40 °C rated value • 560 kW Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 3 rated value Operating frequency 4 rated value Operating frequency 50 Hz Operating frequency 4 rated value Operating frequency 50 Hz Operating frequency 50 Hz Operating frequency 7 rated value Operating frequency 50 Hz Operating frequency 7 rated value Operating frequency 50 Hz Operating frequency 7 rated value Operating frequency 50 Hz Operating frequency 7 rated value 7 rated value Operating frequency 50 Hz Operating frequency 7 rated value 8 rated value 9 rated val	relative positive tolerance of the operating voltage at	10 %
at 230 V at 40 °C rated value at 230 V at inside-delta circuit at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value 560 kW Operating frequency 1 rated value Operating frequency 2 rated value 60 Hz relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] 10 %; Relative to set le 171 W at 50 °C after startup 151 W at 60 °C after startup 151 W at 40 °C during startup 160 °C during startup 170 °C during startup 171 °C during startup 172 °C during startup		
at 400 V at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] 10 % minimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup at 50 °C after startup at 60 °C after startup 141 W power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup at 60 °C during startup type of the motor protection Control circuit/ Control type of the control supply voltage control supply voltage at AC at 50 Hz rated value at 60 Hz rated value at 60 Hz rated value 24 V relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 20 %		160 kW
at 400 V at 40 °C rated value at 400 V at inside-delta circuit at 40 °C rated value Operating frequency 1 rated value Operating frequency 2 rated value Operating frequency 2 rated value Felative negative tolerance of the operating frequency relative positive tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] Dower loss [W] for rated value of the current at AC at 40 °C after startup at 50 °C after startup at 60 °C after startup at 40 °C during startup at 40 °C during startup at 50 °C during startup at 60 °C during startup at 60 °C during startup at 60 °C during startup be at 60 °C during startup at 60 °C during startup at 60 °C during startup be at 60 °C during startup at 60 °C during startup control circuit/ Control type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC at 50 Hz rated value at 60 H	 at 230 V at inside-delta circuit at 40 °C rated value 	315 kW
Operating frequency 1 rated value Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C after startup • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup • at 50 °C during startup • at 50 °C during startup • at 50 °C during startup • at 50 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value		
Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup • at 40 °C during startup • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value • at 60 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 20 %	 at 400 V at inside-delta circuit at 40 °C rated value 	560 kW
Operating frequency 2 rated value relative negative tolerance of the operating frequency relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup • at 50 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup • at 60 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value	Operating frequency 1 rated value	50 Hz
relative positive tolerance of the operating frequency minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 40 °C during startup • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply relative positive tolerance of the control supply 20 %	Operating frequency 2 rated value	60 Hz
minimum load [%] power loss [W] for rated value of the current at AC at 40 °C after startup at 50 °C after startup to at 60 °C after startup at 60 °C after startup at 41 W power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup at 60 °C during startup at 60 °C during startup bye of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC at 50 Hz rated value at 60 Hz rated value relative negative tolerance of the control supply relative positive tolerance of the control supply relative positive tolerance of the control supply 20 %	relative negative tolerance of the operating frequency	-10 %
power loss [W] for rated value of the current at AC • at 40 °C after startup • at 50 °C after startup • at 60 °C after startup • at 60 °C after startup power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value relative negative tolerance of the control supply relative positive tolerance of the control supply 20 %	relative positive tolerance of the operating frequency	10 %
 at 40 °C after startup at 50 °C after startup at 60 °C after startup at 60 °C after startup power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup at 60 °C during startup fo51 W type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage at 50 Hz rated value at 60 Hz rated value at 70 % 		10 %; Relative to set le
at 50 °C after startup at 60 °C after startup power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup at 60 °C during startup type of the motor protection type of voltage of the control supply voltage control supply voltage at AC at 50 Hz rated value at 60 Hz rated value relative negative tolerance of the control supply relative positive tolerance of the control supply 20 %		
 at 60 °C after startup power loss [W] at AC at current limitation 350 % at 40 °C during startup at 50 °C during startup at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage at 50 Hz rated value at 50 Hz rated value at 60 Hz rated value at 720 % 	•	
power loss [W] at AC at current limitation 350 % • at 40 °C during startup • at 50 °C during startup • at 60 °C during startup type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 20 %	·	
 at 40 °C during startup at 50 °C during startup at 60 °C during startup 7 651 W type of the motor protection Control circuit/ Control type of voltage of the control supply voltage at 50 Hz rated value at 60 Hz rated value eat 60 Hz rated value relative negative tolerance of the control supply relative positive tolerance of the control supply 20 % 		141 W
 at 50 °C during startup at 60 °C during startup 7 651 W type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage AC/DC control supply voltage at AC at 50 Hz rated value at 60 Hz rated value 24 V relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 20 % 		
 at 60 °C during startup type of the motor protection Electronic, tripping in the event of thermal overload of the motor Control circuit/ Control type of voltage of the control supply voltage aC/DC control supply voltage at AC at 50 Hz rated value at 60 Hz rated value at 60 Hz rated value relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 20 % 		
type of the motor protection Control circuit/ Control type of voltage of the control supply voltage control supply voltage at AC at 50 Hz rated value at 60 Hz rated value relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply relative positive tolerance of the control supply 20 %		
type of voltage of the control supply voltage control supply voltage at AC at 50 Hz rated value at 60 Hz rated value relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply relative positive tolerance of the control supply 20 %		
type of voltage of the control supply voltage control supply voltage at AC at 50 Hz rated value at 60 Hz rated value 24 V relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 20 %		Electronic, tripping in the event of thermal overload of the motor
control supply voltage at AC • at 50 Hz rated value • at 60 Hz rated value relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 20 %		AC/DC
 at 50 Hz rated value at 60 Hz rated value 24 V relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 20 % 		NOIDO
● at 60 Hz rated value relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 24 V -20 % 20 %		24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz relative positive tolerance of the control supply 20 %		
relative positive tolerance of the control supply 20 %	relative negative tolerance of the control supply	
	relative positive tolerance of the control supply	20 %

relative negative tolerance of the control supply voltage at AC at 60 Hz	20 % dientudong
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage frequency	-10 %
relative positive tolerance of the control supply voltage frequency	10 %
control supply voltage	
at DC rated value	24 V
relative negative tolerance of the control supply voltage at DC	-20 %
relative positive tolerance of the control supply voltage at DC	20 %
control supply current in standby mode rated value	440 mA
holding current in bypass operation rated value	720 mA
locked-rotor current at close of bypass contact maximum	6.7 A
inrush current peak at application of control supply voltage maximum	7.5 A
duration of inrush current peak at application of control supply voltage	20 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	4
with fail-safe	1
parameterizable	4
number of digital outputs	3
Number of digital outputs with fail-safe	1
 number of digital outputs parameterizable 	2
 number of digital outputs not parameterizable 	1
digital output version	2 normally-open contacts (NO) / 1 normally-closed contact (NC) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
Response times	
OFF-delay time with safety-related request when switched off via control inputs maximum	100 ms
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	393 mm
width	210 mm
depth	203 mm
required spacing with side-by-side mounting	
forwards	10 mm
backwards	0 mm
• upwards	100 mm
downwards	75 mm
at the side	5 mm
weight without packaging	10.9 kg
Connections/ Terminals	
type of electrical connection	
 for main current circuit 	busbar connection
for control circuit	spring-loaded terminals
width of connection bar maximum	45 mm

wire length for thermistor connection	diantudana
 with conductor cross-section = 0.5 mm² maximum 	50 m dientudong
 with conductor cross-section = 1.5 mm² maximum 	150 m
• with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
 for DIN cable lug for main contacts stranded 	2x (50 240 mm²)
 for DIN cable lug for main contacts finely stranded 	2x (70 240 mm²)
type of connectable conductor cross-sections	
 for control circuit solid 	2x (0.25 1.5 mm²)
 for control circuit finely stranded with core end processing 	2x (0.25 1.5 mm²)
 at AWG cables for control circuit solid 	2x (24 16)
at AWG cables for control circuit finely stranded with core end processing	2x (24 16)
wire length	
 between soft starter and motor maximum 	800 m
at the digital inputs at DC maximum	1 000 m
tightening torque	
 for main contacts with screw-type terminals 	14 24 N·m
 for auxiliary and control contacts with screw-type 	0.8 1.2 N·m
terminals	
tightening torque [lbf·in]	
 for main contacts with screw-type terminals 	124 210 lbf·in
 for auxiliary and control contacts with screw-type 	7 10.3 lbf·in
terminals	
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m; Derating as of 1000 m, see catalog
ambient temperature	
during operation	-25 +60 °C; Please observe derating at temperatures of 40 °C or above
during storage and transport	-40 +80 °C
environmental category	
 during operation according to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
 during storage according to IEC 60721 	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
during transport according to IEC 60721	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
EMC emitted interference	acc. to IEC 60947-4-2: Class A
Communication/ Protocol	
communication module is supported	
 PROFINET standard 	Yes
 PROFINET high-feature 	Yes
EtherNet/IP	Yes
Modbus RTU	Yes
Modbus TCP	Yes
PROFIBUS	Yes
UL/CSA ratings	
manufacturer's article number	
of the fuse	
usable for Standard Faults up to 575/600 V according to UL	Type: Class J / L, max. 1600 A; Iq = 30 kA
usable for High Faults up to 575/600 V according to UL	Type: Class J / L, max. 1200 A; Iq = 100 kA
usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 1600 A; Iq = 30 kA
usable for High Faults at inside-delta circuit up to 575/600 V according to UL	Type: Class J / L, max. 1200 A; Iq = 100 kA
operating power [hp] for 3-phase motors	
• at 200/208 V at 50 °C rated value	150 hp
• at 220/230 V at 50 °C rated value	200 hp
• at 460/480 V at 50 °C rated value	400 hp
	400 110
 at 200/208 V at inside-delta circuit at 50 °C rated 	300 hp

 at 220/230 V at inside-delta circuit at 50 °C rated value 	350 hp 750 hp dientudong
 at 460/480 V at inside-delta circuit at 50 °C rated value 	750 hp
contact rating of auxiliary contacts according to UL	R300-B300
Safety related data	
safety device type according to IEC 61508-2	Type B
B10d value	648 000
Safety Integrity Level (SIL)	
according to IEC 61508	SIL1
SIL Claim Limit (subsystem) according to EN 62061	SIL 1
performance level (PL) according to EN ISO 13849-1	С
category according to EN ISO 13849-1	2
stop category according to EN 60204-1	0
Safe failure fraction (SFF)	60 %
average diagnostic coverage level (DCavg)	90 %
diagnostics test interval by internal test function maximum	1 000 s
PFHD with high demand rate according to EN 62061	1E-6 1/h
PFDavg with low demand rate according to IEC 61508	0.09
hardware fault tolerance according to IEC 61508	0
T1 value for proof test interval or service life according to IEC 61508	20 y
safe state	Open load circuit
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
electromagnetic compatibility	acc. to IEC 60947-4-2
ATEX	
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
according to ATEX directive 2014/34/EU	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
PFHD with high demand rate according to EN 62061 relating to ATEX	5E-7 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 s

General Product Approval



Certificates/ approvals



Confirmation







EMC For use in hazardous locations Declaration of Conformity Test Certificates Marine / Shipping









Type Test Certificates/Test Report



Marine / Shipping









Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5548-2HF04

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5548-2HF04

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5548-2HF04

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5548-2HF04\&lang=en}$

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5548-2HF04/char


Characteristic: Installation altitude

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5548-2HF04&objecttype=14&gridview=view1


Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

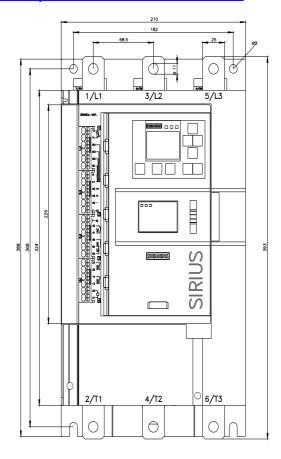

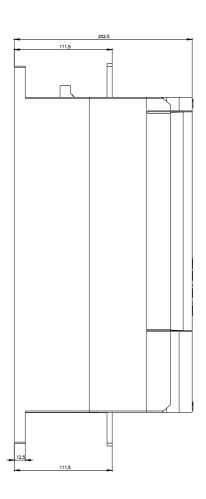



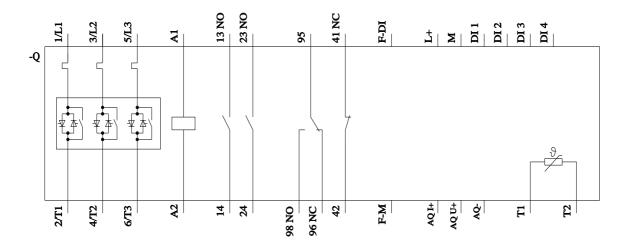

last modified: 5/13/2022 **C**

Hotline: 0909000786 - lam@dientudong.com

