## **SIEMENS**



Data sheet 3RW5545-6HA14



SIRIUS soft starter 200-480 V 315 A, 110-250 V AC Screw terminals

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW55
manufacturer's article number	
<ul> <li>of high feature HMI module usable</li> </ul>	3RW5980-0HF00
<ul> <li>of communication module PROFINET standard usable</li> </ul>	3RW5980-0CS00
<ul> <li>of communication module PROFINET high-feature usable</li> </ul>	3RW5950-0CH00
<ul> <li>of communication module PROFIBUS usable</li> </ul>	3RW5980-0CP00
<ul> <li>of communication module Modbus TCP usable</li> </ul>	3RW5980-0CT00
<ul> <li>of communication module Modbus RTU usable</li> </ul>	3RW5980-0CR00
<ul> <li>of communication module Ethernet/IP</li> </ul>	3RW5980-0CE00
<ul> <li>of circuit breaker usable at 400 V</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V</li> </ul>	3VA2440-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 400 V at inside-delta circuit</li> </ul>	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of circuit breaker usable at 500 V at inside-delta circuit</li> </ul>	3VA2580-6HN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
<ul> <li>of the gG fuse usable up to 690 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of the gG fuse usable at inside-delta circuit up to 500 V</li> </ul>	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
<ul> <li>of full range R fuse link for semiconductor protection usable up to 690 V</li> </ul>	3NE1334-2; Type of coordination 2, Iq = 65 kA

addic up to 656 v	
General technical data	
starting voltage [%]	20 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 360 s
ramp-down time of soft starter	0 360 s
start torque [%]	10 100 %
stopping torque [%]	10 100 %
torque limitation [%]	20 200 %
current limiting value [%] adjustable	125 800 %
breakaway voltage [%] adjustable	40 100 %
breakaway time adjustable	0 2 s
number of parameter sets	3
accuracy class according to IEC 61557-12	5 %
certificate of suitability	
CE marking	Yes
<ul> <li>UL approval</li> </ul>	Yes

004	V.
CSA approval	Yes dientudong
product component	v •••∋)   H
HMI-High Feature	
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	3
trip class	CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2
current unbalance limiting value [%]	10 60 %
ground-fault monitoring limiting value [%]	10 95 %
buffering time in the event of power failure	
for main current circuit	100 ms
for control circuit	100 ms
idle time adjustable	0 255 s
insulation voltage rated value	480 V
degree of pollution	3, acc. to IEC 60947-4-2
impulse voltage rated value	6 kV
blocking voltage of the thyristor maximum	1 400 V
service factor	1.15
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
between main and auxiliary circuit	480 V; does not apply for thermistor connection
shock resistance	15 g / 11 ms, from 6 g / 11 ms with potential contact lifting
vibration resistance	15 mm up to 6 Hz; 2 g up to 500 Hz
recovery time after overload trip adjustable	60 1 800 s
utilization category according to IEC 60947-4-2	AC 53a
reference code according to IEC 81346-2	0
Substance Prohibitance (Date)	02/15/2018
product function	
• ramp-up (soft starting)	Yes
• ramp-down (soft stop)	Yes
breakaway pulse	Yes
adjustable current limitation	Yes
creep speed in both directions of rotation	Yes
pump ramp down	Yes
DC braking	Yes
motor heating	Yes
slave pointer function	Yes
trace function	Yes
intrinsic device protection	Yes
·	Yes; Full motor protection (thermistor motor protection and electronic
motor overload protection	motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit.
<ul> <li>evaluation of thermistor motor protection</li> </ul>	Yes; Type A PTC or Klixon / Thermoclick
inside-delta circuit	Yes
• auto-RESET	Yes
manual RESET	Yes
• remote reset	Yes
communication function	Yes
operating measured value display	Yes
• event list	Yes
error logbook	Yes
via software parameterizable	Yes
via software configurable	Yes
screw terminal	Yes
spring-loaded terminal	No
PROFlenergy	Yes; in connection with the PROFINET Standard and PROFINET High-
FROFienergy      firmware update	Feature communication modules  Yes
removable terminal for control circuit	Yes
<ul><li>voltage ramp</li></ul>	Yes

<ul> <li>torque control</li> </ul>	Yes Yes Yes; 4 20 mA (de ) 16 Valentudong
<ul> <li>combined braking</li> </ul>	Yes
analog output	Yes; 4 20 mA (de ) 16 V
<ul> <li>programmable control inputs/outputs</li> </ul>	Yes
<ul> <li>condition monitoring</li> </ul>	Yes
<ul> <li>automatic parameterisation</li> </ul>	Yes
<ul> <li>application wizards</li> </ul>	Yes
<ul> <li>alternative run-down</li> </ul>	Yes
<ul> <li>emergency operation mode</li> </ul>	Yes
<ul> <li>reversing operation</li> </ul>	Yes
<ul> <li>soft starting at heavy starting conditions</li> </ul>	Yes
Power Electronics	
operational current	
<ul> <li>at 40 °C rated value</li> </ul>	315 A
<ul> <li>at 40 °C rated value minimum</li> </ul>	63 A
<ul> <li>at 50 °C rated value</li> </ul>	279 A
<ul> <li>at 60 °C rated value</li> </ul>	255 A
operational current at inside-delta circuit	
<ul> <li>at 40 °C rated value</li> </ul>	546 A
<ul> <li>at 50 °C rated value</li> </ul>	483 A
at 60 °C rated value	442 A
operating voltage	
• rated value	200 480 V
at inside-delta circuit rated value	200 480 V
relative negative tolerance of the operating voltage	-15 %
relative positive tolerance of the operating voltage	10 %
relative negative tolerance of the operating voltage at	-15 %
inside-delta circuit	12.04
relative positive tolerance of the operating voltage at inside-delta circuit	10 %
operating power for 3-phase motors	
at 230 V at 40 °C rated value	90 kW
<ul> <li>at 230 V at inside-delta circuit at 40 °C rated value</li> </ul>	160 kW
<ul> <li>at 400 V at 40 °C rated value</li> </ul>	160 kW
• at 400 V at inside-delta circuit at 40 °C rated value	315 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
relative negative tolerance of the operating frequency	-10 %
relative positive tolerance of the operating frequency	10 %
relative positive tolerance of the operating frequency minimum load [%]	10 % 10 %; Relative to set le
minimum load [%]	
minimum load [%] power loss [W] for rated value of the current at AC	10 %; Relative to set le
minimum load [%] power loss [W] for rated value of the current at AC • at 40 °C after startup	10 %; Relative to set le 95 W
minimum load [%] power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup	10 %; Relative to set le  95 W 84 W
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup	10 %; Relative to set le  95 W 84 W
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %	10 %; Relative to set le  95 W 84 W 77 W
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup	10 %; Relative to set le  95 W 84 W 77 W 4 966 W
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage at AC	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage at AC  • at 50 Hz	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage at AC  • at 50 Hz  • at 60 Hz  relative negative tolerance of the control supply	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor  AC  110 250 V 110 250 V
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage at AC  • at 50 Hz  • at 60 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative positive tolerance of the control supply	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor  AC  110 250 V 110 250 V -15 %
minimum load [%]  power loss [W] for rated value of the current at AC  • at 40 °C after startup  • at 50 °C after startup  • at 60 °C after startup  power loss [W] at AC at current limitation 350 %  • at 40 °C during startup  • at 50 °C during startup  • at 60 °C during startup  type of the motor protection  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage at AC  • at 50 Hz  • at 60 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz  relative positive tolerance of the control supply voltage at AC at 50 Hz  relative negative tolerance of the control supply voltage at AC at 50 Hz	10 %; Relative to set le  95 W 84 W 77 W  4 966 W 4 153 W 3 646 W Electronic, tripping in the event of thermal overload of the motor  AC  110 250 V 110 250 V -15 %

voltage at AC at 60 Hz	dientudena
control supply voltage frequency	50 60 Hz -10 % dientudong
relative negative tolerance of the control supply voltage frequency	
relative positive tolerance of the control supply voltage frequency	10 %
control supply current in standby mode rated value	100 mA
holding current in bypass operation rated value	150 mA
locked-rotor current at close of bypass contact maximum	0.87 A
inrush current peak at application of control supply voltage maximum	43 A
duration of inrush current peak at application of control supply voltage	1.6 ms
design of the overvoltage protection	Varistor
design of short-circuit protection for control circuit	4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
Inputs/ Outputs	
number of digital inputs	4
parameterizable	4
number of digital outputs	4
number of digital outputs parameterizable	3
number of digital outputs not parameterizable	1
digital output version	3 normally-open contacts (NO) / 1 changeover contact (CO)
number of analog outputs	1
switching capacity current of the relay outputs	
at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A
Installation/ mounting/ dimensions	
mounting position	Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°)
fastening method	screw fixing
height	393 mm
width	210 mm
depth	203 mm
required spacing with side-by-side mounting	
• forwards	10 mm
• backwards	0 mm
• upwards	100 mm
• downwards	75 mm
at the side	5 mm
weight without packaging	10.2 kg
Connections/ Terminals	
type of electrical connection	
for main current circuit	busbar connection
for control circuit	screw-type terminals
width of connection bar maximum	45 mm
wire length for thermistor connection	
with conductor cross-section = 0.5 mm² maximum	50 m
with conductor cross-section = 1.5 mm² maximum	150 m
with conductor cross-section = 2.5 mm² maximum	250 m
type of connectable conductor cross-sections	
for DIN cable lug for main contacts stranded	2x (50 240 mm²)
for DIN cable lug for main contacts finely stranded	2x (70 240 mm²)
type of connectable conductor cross-sections	
for control circuit solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
<ul> <li>for control circuit finely stranded with core end processing</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
at AWG cables for control circuit solid	1x (20 12), 2x (20 14)
wire length  • between soft starter and motor maximum	800 m

• for auxiliary and control contacts with screw-type terminals  tightening torque [lbf·in]  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  124 210 lbf·in  7 10.3 lbf·in	dientudong)
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> <li>tightening torque [lbf·in]</li> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>124 210 lbf·in</li> <li>7 10.3 lbf·in</li> </ul>	
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> <li>tightening torque [lbf·in]</li> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>124 210 lbf·in</li> <li>7 10.3 lbf·in</li> </ul>	Durontagong
terminals  tightening torque [lbf-in]  • for main contacts with screw-type terminals  • for auxiliary and control contacts with screw-type terminals  124 210 lbf-in 7 10.3 lbf-in	
<ul> <li>for main contacts with screw-type terminals</li> <li>for auxiliary and control contacts with screw-type terminals</li> <li>124 210 lbf·in</li> <li>7 10.3 lbf·in</li> </ul>	
• for auxiliary and control contacts with screw-type 7 10.3 lbf·in terminals	
terminals	
Ambient conditions	
installation altitude at height above sea level maximum 5 000 m; Derating as of 10	000 m, see catalog
ambient temperature	
<ul> <li>during operation</li> <li>-25 +60 °C; Please observed</li> <li>above</li> </ul>	erve derating at temperatures of 40 °C or
• during storage and transport -40 +80 °C	
environmental category	
<ul> <li>during operation according to IEC 60721</li> <li>3K6 (no ice formation, only mist), 3S2 (sand must not generated)</li> </ul>	occasional condensation), 3C3 (no salt get into the devices), 3M6
<ul> <li>during storage according to IEC 60721</li> <li>1K6 (only occasional condent not get inside the devices),</li> </ul>	ensation), 1C2 (no salt mist), 1S2 (sand must , 1M4
• during transport according to IEC 60721 2K2, 2C1, 2S1, 2M2 (max.	fall height 0.3 m)
EMC emitted interference acc. to IEC 60947-4-2: Cla	ss A
Communication/ Protocol	
communication module is supported	
PROFINET standard     Yes	
PROFINET high-feature     Yes	
• EtherNet/IP Yes	
Modbus RTU     Yes	
Modbus TCP     Yes	
• PROFIBUS Yes	
UL/CSA ratings	
manufacturer's article number	
of circuit breaker	
<ul> <li>usable for Standard Faults at 460/480 V</li> <li>Siemens type: 3VA53, max</li> <li>according to UL</li> </ul>	x. 400 A or 3VA54, max. 600 A; Iq = 18 kA
<ul> <li>usable for High Faults at 460/480 V according to UL</li> <li>Siemens type: 3VA53, max kA</li> </ul>	x. 400 A or 3VA54, max. 600 A; Iq max = 65
— usable for Standard Faults at 460/480 V at inside-delta circuit according to UL	x. 600 A; Iq = 18 kA
— usable for High Faults at 460/480 V at insidedelta circuit according to UL	x. 600 A; Iq max = 65 kA
— usable for Standard Faults at 575/600 V Siemens type: 3VA53, max according to UL	x. 400 A or 3VA54, max. 600 A; Iq = 18 kA
— usable for High Faults at 575/600 V at insidedelta circuit according to UL	x. 600 A; Iq max = 65 kA
— usable for Standard Faults at 575/600 V at inside-delta circuit according to UL	x. 600 A; Iq = 18 kA
• of the fuse	
— usable for Standard Faults up to 575/600 V Type: Class J / L, max. 100 according to UL	00 A; lq = 18 kA
— usable for High Faults up to 575/600 V Type: Class J / L, max. 100 according to UL	00 A; Iq = 100 kA
— usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL	00 A; lq = 18 kA
<ul> <li>usable for High Faults at inside-delta circuit up to 575/600 V according to UL</li> <li>Type: Class J / L, max. 100</li> </ul>	00 A; lq = 100 kA
operating power [hp] for 3-phase motors	
• at 200/208 V at 50 °C rated value 75 hp	
• at 220/230 V at 50 °C rated value 100 hp	
• at 460/480 V at 50 °C rated value 200 hp	
• at 200/208 V at inside-delta circuit at 50 °C rated value	
• at 220/230 V at inside-delta circuit at 50 °C rated value 200 hp	

• at 460/480 V at inside-delta circuit at 50 °C rated value	400 hp diontudona
contact rating of auxiliary contacts according to UL	R300-B300
Safety related data	
protection class IP on the front according to IEC 60529	IP00; IP20 with cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover
electromagnetic compatibility	acc. to IEC 60947-4-2
ATEX	
certificate of suitability	
• ATEX	Yes
• IECEx	Yes
<ul> <li>according to ATEX directive 2014/34/EU</li> </ul>	BVS 18 ATEX F 003 X
type of protection according to ATEX directive 2014/34/EU	II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb]
hardware fault tolerance according to IEC 61508 relating to ATEX	0
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.008
PFHD with high demand rate according to EN 62061 relating to ATEX	5E-7 1/h
Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX	SIL1
T1 value for proof test interval or service life according to IEC 61508 relating to ATEX	3 s
Certificates/ approvals	

**®** 

**General Product Approval** 

Confirmation









**EMC** 

For use in hazardous locations

Declaration of Conformity

**Test Certificates** 

Marine / Shipping







Type Test Certificates/Test Report





Marine / Shipping

other







Confirmation

## **Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

 $\underline{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5545-6HA14}$ 

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RW5545-6HA14}}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5545-6HA14

 $Image\ database\ (product\ images, 2D\ dimension\ drawings, 3D\ models, device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$ 

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RW5545-6HA14&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current <a href="https://support.industry.siemens.com/cs/ww/en/ps/3RW5545-6HA14/char">https://support.industry.siemens.com/cs/ww/en/ps/3RW5545-6HA14/char</a>


Characteristic: Installation altitude

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5


Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917

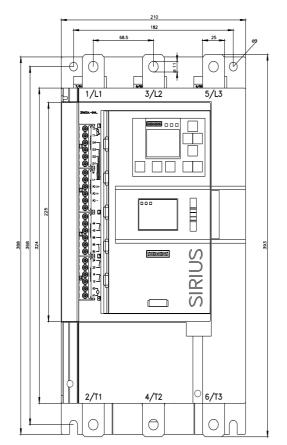

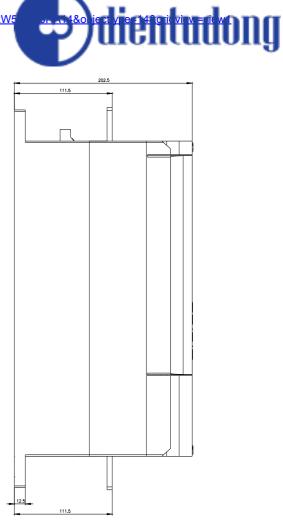



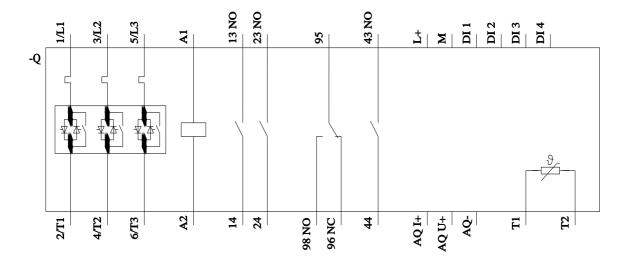

last modified: 5/13/2022 **C** 

Hotline: 0909000786 - lam@dientudong.com

