

**Data sheet****3RW5543-6HF14**

Figure similar

SIRIUS soft starter 200-480 V 210 A, 110-250 V AC, Screw terminals Fail-safe

|   |   |
|---|---|
| <b>product brand name</b>   | SIRIUS  |
| <b>product category</b>   | Hybrid switching devices  |
| <b>product designation</b>  | Failsafe soft starters  |
| <b>product type designation</b>   | 3RW55   |
| <b>manufacturer's article number</b>  |   |
| • of high feature HMI module usable   | <a href="#">3RW5980-0HF00</a>   |
| • of communication module PROFINET standard usable  | <a href="#">3RW5980-0CS00</a>   |
| • of communication module PROFINET high-feature usable  | <a href="#">3RW5950-0CH00</a>   |
| • of communication module PROFIBUS usable   | <a href="#">3RW5980-0CP00</a>   |
| • of communication module Modbus TCP usable   | <a href="#">3RW5980-0CT00</a>   |
| • of communication module Modbus RTU usable   | <a href="#">3RW5980-0CR00</a>   |
| • of communication module Ethernet/IP   | <a href="#">3RW5980-0CE00</a>   |
| • of circuit breaker usable at 400 V  | <a href="#">3VA2325-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a>              |
| • of circuit breaker usable at 500 V  | <a href="#">3VA2325-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a>              |
| • of circuit breaker usable at 400 V at inside-delta circuit  | <a href="#">3VA2440-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a>              |
| • of circuit breaker usable at 500 V at inside-delta circuit  | <a href="#">3VA2440-7MN32-0AA0: Type of coordination 1, Iq = 65 kA, CLASS 10</a>              |
| • of the gG fuse usable up to 690 V   | <a href="#">2x3NA3354-6; Type of coordination 1, Iq = 65 kA</a>                               |
| • of the gG fuse usable at inside-delta circuit up to 500 V   | <a href="#">2x3NA3354-6; Type of coordination 1, Iq = 65 kA</a>                               |
| • of full range R fuse link for semiconductor protection usable up to 690 V                               | <a href="#">3NE1230-2; for supply systems up to 500 V; type of coordination 2, Iq = 65 kA</a> |
| • of back-up R fuse link for semiconductor protection usable up to 690 V                                  | <a href="#">3NE3333; Type of coordination 2, Iq = 65 kA</a>                                   |
| • of the redundant contactor for applications > SIL 1 according to EN 62061                               | <a href="#">3RT1075</a>   |
| • of the redundant contactor for applications > SIL 1 at inside-delta circuit according to EN 62061       | <a href="#">3RT1075</a>   |
| • of the redundant contactor for applications > SIL 1 according to EN ISO 13849-1                         | <a href="#">3RT1076</a>   |
| • of the redundant contactor for applications > SIL 1 at inside-delta circuit according to EN ISO 13849-1 | <a href="#">3RT1076</a>   |

**General technical data**

|   |                      |
|---|----------------------|
| <b>starting voltage [%]</b>               | 20 ... 100 %         |
| <b>stopping voltage [%]</b>               | 50 %; non-adjustable |
| <b>start-up ramp time of soft starter</b> | 0 ... 360 s          |
| <b>ramp-down time of soft starter</b>     | 0 ... 360 s          |
| <b>start torque [%]</b>                   | 10 ... 100 %         |



|   |  |
|---|--|
| <b>stopping torque [%]</b>                              | 10 ... 100 %   |
| <b>torque limitation [%]</b>                            | 20 ... 200 %   |
| <b>current limiting value [%] adjustable</b>            | 125 ... 800 %  |
| <b>breakaway voltage [%] adjustable</b>                 | 40 ... 100 %   |
| <b>breakaway time adjustable</b>                        | 0 ... 2 s  |
| <b>number of parameter sets</b>                         | 3  |
| <b>accuracy class according to IEC 61557-12</b>         | 5 %  |
| <b>certificate of suitability</b>                       |  |
| • CE marking  | Yes  |
| • UL approval   | Yes  |
| • CSA approval  | Yes  |
| <b>product component</b>                                |  |
| • HMI-High Feature                                      | Yes  |
| • is supported HMI-High Feature                         | Yes  |
| <b>product feature integrated bypass contact system</b> | Yes  |
| <b>number of controlled phases</b>                      | 3  |
| <b>trip class</b>                                       | CLASS 10A / 10E (default) / 20E / 30E; acc. to IEC 60947-4-2   |
| <b>current unbalance limiting value [%]</b>             | 10 ... 60 %  |
| <b>ground-fault monitoring limiting value [%]</b>       | 10 ... 95 %  |
| <b>buffering time in the event of power failure</b>     |  |
| • for main current circuit                              | 100 ms   |
| • for control circuit                                   | 100 ms   |
| <b>idle time adjustable</b>                             | 0 ... 255 s  |
| insulation voltage rated value                          | 480 V  |
| <b>degree of pollution</b>                              | 3, acc. to IEC 60947-4-2   |
| <b>impulse voltage rated value</b>                      | 6 kV   |
| <b>blocking voltage of the thyristor maximum</b>        | 1 400 V  |
| <b>service factor</b>                                   | 1.15   |
| <b>surge voltage resistance rated value</b>             | 6 kV   |
| <b>maximum permissible voltage for safe isolation</b>   |  |
| • between main and auxiliary circuit                    | 480 V; does not apply for thermistor connection  |
| <b>shock resistance</b>                                 | 15 g / 11 ms, from 6 g / 11 ms with potential contact lifting  |
| <b>vibration resistance</b>                             | 15 mm up to 6 Hz; 2 g up to 500 Hz   |
| <b>recovery time after overload trip adjustable</b>     | 60 ... 1 800 s   |
| utilization category according to IEC 60947-4-2         | AC 53a   |
| <b>reference code according to IEC 81346-2</b>          | Q  |
| <b>Substance Prohibition (Date)</b>                     | 11/22/2019   |
| <b>product function</b>                                 |  |
| • ramp-up (soft starting)                               | Yes  |
| • ramp-down (soft stop)                                 | Yes  |
| • breakaway pulse                                       | Yes  |
| • adjustable current limitation                         | Yes  |
| • creep speed in both directions of rotation            | Yes  |
| • pump ramp down  | Yes  |
| • DC braking  | Yes  |
| • motor heating   | Yes  |
| • slave pointer function                                | Yes  |
| • trace function  | Yes  |
| • intrinsic device protection                           | Yes  |
| • motor overload protection                             | Yes; Full motor protection (thermistor motor protection and electronic motor overload protection) / When using the motor overload protection according to ATEX, an upstream contactor is required in inside-delta circuit. |
| • evaluation of thermistor motor protection             | Yes; Type A PTC or Klixon / Thermoclick  |
| • inside-delta circuit                                  | Yes  |
| • auto-RESET  | Yes  |
| • manual RESET  | Yes  |
| • remote reset  | Yes  |
| • communication function                                | Yes  |
| • operating measured value display                      | Yes  |
| • event list  | Yes  |



|   |   |
|---|---|
| • error logbook                               | Yes   |
| • via software parameterizable                | Yes   |
| • via software configurable                   | Yes   |
| • screw terminal                              | Yes   |
| • spring-loaded terminal                      | No  |
| • PROFenergy                                  | Yes; in connection with the PROFINET Standard and PROFINET High-Feature communication modules |
| <b>firmware update</b>                        | Yes   |
| <b>removable terminal for control circuit</b> | Yes   |
| • voltage ramp                                | Yes   |
| • torque control                              | Yes   |
| • combined braking                            | Yes   |
| • analog output                               | Yes; 4 ... 20 mA (default) / 0 ... 10 V   |
| • programmable control inputs/outputs         | Yes   |
| • condition monitoring                        | Yes   |
| • automatic parameterisation                  | Yes   |
| • application wizards                         | Yes   |
| • alternative run-down                        | Yes   |
| • emergency operation mode                    | Yes   |
| • reversing operation                         | Yes   |
| • soft starting at heavy starting conditions  | Yes   |

## Power Electronics

|   |  |
|---|--|
| <b>operational current</b>  |  |
| • at 40 °C rated value  | 210 A  |
| • at 40 °C rated value minimum  | 42 A   |
| • at 50 °C rated value  | 186 A  |
| • at 60 °C rated value  | 170 A  |
| <b>operational current at inside-delta circuit</b>                                  |  |
| • at 40 °C rated value  | 364 A  |
| • at 50 °C rated value  | 322 A  |
| • at 60 °C rated value  | 294 A  |
| <b>operating voltage</b>  |  |
| • rated value   | 200 ... 480 V  |
| • at inside-delta circuit rated value   | 200 ... 480 V  |
| <b>relative negative tolerance of the operating voltage</b>                         | -15 %  |
| <b>relative positive tolerance of the operating voltage</b>                         | 10 %   |
| <b>relative negative tolerance of the operating voltage at inside-delta circuit</b> | -15 %  |
| <b>relative positive tolerance of the operating voltage at inside-delta circuit</b> | 10 %   |
| <b>operating power for 3-phase motors</b>   |  |
| • at 230 V at 40 °C rated value   | 55 kW  |
| • at 230 V at inside-delta circuit at 40 °C rated value                             | 110 kW   |
| • at 400 V at 40 °C rated value   | 110 kW   |
| • at 400 V at inside-delta circuit at 40 °C rated value                             | 200 kW   |
| <b>Operating frequency 1 rated value</b>  | 50 Hz  |
| <b>Operating frequency 2 rated value</b>  | 60 Hz  |
| <b>relative negative tolerance of the operating frequency</b>                       | -10 %  |
| <b>relative positive tolerance of the operating frequency</b>                       | 10 %   |
| <b>minimum load [%]</b>   | 10 %; Relative to set $I_e$  |
| <b>power loss [W] for rated value of the current at AC</b>                          |  |
| • at 40 °C after startup  | 63 W   |
| • at 50 °C after startup  | 56 W   |
| • at 60 °C after startup  | 51 W   |
| <b>power loss [W] at AC at current limitation 350 %</b>                             |  |
| • at 40 °C during startup   | 3 550 W  |
| • at 50 °C during startup   | 2 967 W  |
| • at 60 °C during startup   | 2 605 W  |
| <b>type of the motor protection</b>   | Electronic, tripping in the event of thermal overload of the motor |
| <b>Control circuit/ Control</b>   |  |
| <b>type of voltage of the control supply voltage</b>                                | AC   |



|   |  |
|---|--|
| <b>control supply voltage at AC</b>   |  |
| • at 50 Hz  | 110 ... 250 V  |
| • at 60 Hz  | 110 ... 250 V  |
| <b>relative negative tolerance of the control supply voltage at AC at 50 Hz</b> | -15 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 50 Hz</b> | 10 %   |
| <b>relative negative tolerance of the control supply voltage at AC at 60 Hz</b> | -15 %  |
| <b>relative positive tolerance of the control supply voltage at AC at 60 Hz</b> | 10 %   |
| <b>control supply voltage frequency</b>   | 50 ... 60 Hz   |
| <b>relative negative tolerance of the control supply voltage frequency</b>      | -10 %  |
| <b>relative positive tolerance of the control supply voltage frequency</b>      | 10 %   |
| <b>control supply current in standby mode rated value</b>                       | 100 mA   |
| <b>holding current in bypass operation rated value</b>                          | 150 mA   |
| <b>locked-rotor current at close of bypass contact maximum</b>                  | 0.87 A   |
| inrush current peak at application of control supply maximum                    | 43 A   |
| duration of inrush current peak at application of control supply voltage        | 1.6 ms   |
| <b>design of the overvoltage protection</b>                                     | Varistor   |
| <b>design of short-circuit protection for control circuit</b>                   | 4 A gG fuse ( $I_{cu}=1\text{ kA}$ ), 6 A quick-acting fuse ( $I_{cu}=1\text{ kA}$ ), C1 miniature circuit breaker ( $I_{cu}=600\text{ A}$ ), C6 miniature circuit breaker ( $I_{cu}=300\text{ A}$ ); Is not part of scope of supply |


| <b>Inputs/ Outputs</b>                                 |  |
|--|--|
| <b>number of digital inputs</b>                        | 4  |
| • with fail-safe                                       | 1  |
| • parameterizable                                      | 4  |
| <b>number of digital outputs</b>                       | 3  |
| • Number of digital outputs with fail-safe             | 1  |
| • number of digital outputs parameterizable            | 2  |
| • number of digital outputs not parameterizable        | 1  |
| <b>digital output version</b>                          | 2 normally-open contacts (NO) / 1 normally-closed contact (NC) / 1 changeover contact (CO) |
| <b>number of analog outputs</b>                        | 1  |
| <b>switching capacity current of the relay outputs</b> |  |
| • at AC-15 at 250 V rated value                        | 3 A  |
| • at DC-13 at 24 V rated value                         | 1 A  |

| <b>Response times</b>   |  |
|---|--|
| OFF-delay time with safety-related request when switched off via control inputs maximum | 100 ms   |
| <b>Installation/ mounting/ dimensions</b>   |  |
| <b>mounting position</b>  | Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°) |
| <b>fastening method</b>   | screw fixing   |
| <b>height</b>   | 393 mm   |
| <b>width</b>  | 210 mm   |
| <b>depth</b>  | 203 mm   |
| required spacing with side-by-side mounting   |  |
| • forwards  | 10 mm  |
| • backwards   | 0 mm   |
| • upwards   | 100 mm   |
| • downwards   | 75 mm  |
| • at the side   | 5 mm   |
| <b>weight without packaging</b>   | 10.2 kg  |

| <b>Connections/ Terminals</b>        |                      |
|--------------------------------------|----------------------|
| <b>type of electrical connection</b> |                      |
| • for main current circuit           | busbar connection    |
| • for control circuit                | screw-type terminals |



|   |   |
|---|---|
| <b>width of connection bar maximum</b>  | 45 mm   |
| <b>wire length for thermistor connection</b>                                      |   |
| • with conductor cross-section = 0.5 mm <sup>2</sup> maximum                      | 50 m  |
| • with conductor cross-section = 1.5 mm <sup>2</sup> maximum                      | 150 m   |
| • with conductor cross-section = 2.5 mm <sup>2</sup> maximum                      | 250 m   |
| <b>type of connectable conductor cross-sections</b>                               |   |
| • for DIN cable lug for main contacts stranded                                    | 2x (50 ... 240 mm <sup>2</sup> )  |
| • for DIN cable lug for main contacts finely stranded                             | 2x (70 ... 240 mm <sup>2</sup> )  |
| <b>type of connectable conductor cross-sections</b>                               |   |
| • for control circuit solid   | 1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )  |
| • for control circuit finely stranded with core end processing                    | 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )  |
| • at AWG cables for control circuit solid   | 1x (20 ... 12), 2x (20 ... 14)  |
| <b>wire length</b>  |   |
| • between soft starter and motor maximum  | 800 m   |
| • at the digital inputs at DC maximum   | 1 000 m   |
| <b>tightening torque</b>  |   |
| • for main contacts with screw-type terminals                                     | 14 ... 24 N·m   |
| • for auxiliary and control contacts with screw-type terminals                    | 0.8 ... 1.2 N·m   |
| <b>tightening torque [lbf-in]</b>   |   |
| • for main contacts with screw-type terminals                                     | 124 ... 210 lbf-in  |
| • for auxiliary and control contacts with screw-type terminals                    | 7 ... 10.3 lbf-in   |
| <b>Ambient conditions</b>   |   |
| installation altitude at height above sea level maximum                           | 2 000 m; Derating as of 1000 m, see catalog   |
| <b>ambient temperature</b>  |   |
| • during operation  | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above   |
| • during storage and transport  | -40 ... +80 °C  |
| <b>environmental category</b>   |   |
| • during operation according to IEC 60721   | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| • during storage according to IEC 60721   | 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4                 |
| • during transport according to IEC 60721   | 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)   |
| <b>EMC emitted interference</b>   | acc. to IEC 60947-4-2: Class A  |
| <b>Communication/ Protocol</b>  |   |
| <b>communication module is supported</b>  |   |
| • PROFINET standard   | Yes   |
| • PROFINET high-feature   | Yes   |
| • EtherNet/IP   | Yes   |
| • Modbus RTU  | Yes   |
| • Modbus TCP  | Yes   |
| • PROFIBUS  | Yes   |
| <b>UL/CSA ratings</b>   |   |
| <b>manufacturer's article number</b>  |   |
| <b>• of circuit breaker</b>   |   |
| — usable for Standard Faults at 460/480 V according to UL                         | Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA  |
| — usable for High Faults at 460/480 V according to UL                             | Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA  |
| — usable for Standard Faults at 460/480 V at inside-delta circuit according to UL | Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA  |
| — usable for High Faults at 460/480 V at inside-delta circuit according to UL     | Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA  |
| — usable for Standard Faults at 575/600 V according to UL                         | Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA  |
| — usable for High Faults at 575/600 V at inside-delta circuit according to UL     | Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq max = 65 kA  |
| — usable for Standard Faults at 575/600 V at inside-delta circuit according to UL | Siemens type: 3VA53, max. 400 A or 3VA54, max. 600 A; Iq = 10 kA  |
| <b>• of the fuse</b>  |   |



**dientudong**

- usable for Standard Faults up to 575/600 V according to UL
- usable for High Faults up to 575/600 V according to UL
- usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL
- usable for High Faults at inside-delta circuit up to 575/600 V according to UL

- Type: Class J / L, max. 700 A; Iq = 10 kA
- Type: Class J / L, max. 700 A; Iq = 100 kA
- Type: Class J / L, max. 700 A; Iq = 10 kA
- Type: Class J / L, max. 700 A; Iq = 100 kA

#### operating power [hp] for 3-phase motors

- at 200/208 V at 50 °C rated value
- at 220/230 V at 50 °C rated value
- at 460/480 V at 50 °C rated value
- at 200/208 V at inside-delta circuit at 50 °C rated value
- at 220/230 V at inside-delta circuit at 50 °C rated value
- at 460/480 V at inside-delta circuit at 50 °C rated value

- 60 hp
- 60 hp
- 150 hp
- 100 hp
- 125 hp
- 250 hp

#### contact rating of auxiliary contacts according to UL

R300-B300

#### Safety related data

|   |   |
|---|---|
| safety device type according to IEC 61508-2                             | Type B  |
| B10d value  | 147 000   |
| Safety Integrity Level (SIL)  |   |
| • according to IEC 61508  | SIL1  |
| SIL Claim Limit (subsystem) according to EN 62061                       | SIL 1   |
| performance level (PL) according to EN ISO 13849-1                      | c   |
| category according to EN ISO 13849-1                                    | 2   |
| stop category according to EN 60204-1                                   | 0   |
| Safe failure fraction (SFF)   | 60 %  |
| average diagnostic coverage level (DCavg)                               | 90 %  |
| diagnostics test interval by internal test function maximum             | 1 000 s   |
| PFHD with high demand rate according to EN 62061                        | 1E-6 1/h  |
| PFDavg with low demand rate according to IEC 61508                      | 0.09  |
| hardware fault tolerance according to IEC 61508                         | 0   |
| T1 value for proof test interval or service life according to IEC 61508 | 20 y  |
| safe state  | Open load circuit   |
| protection class IP on the front according to IEC 60529                 | IP00; IP20 with cover                                       |
| touch protection on the front according to IEC 60529                    | finger-safe, for vertical contact from the front with cover |
| electromagnetic compatibility   | acc. to IEC 60947-4-2                                       |

#### ATEX

|  |  |
|--|--|
| certificate of suitability   |  |
| • ATEX   | Yes  |
| • IECEx  | Yes  |
| • according to ATEX directive 2014/34/EU   | BVS 18 ATEX F 003 X  |
| type of protection according to ATEX directive 2014/34/EU                                | II (2)G [Ex eb Gb] [Ex db Gb] [Ex pxb Gb], II (2)D [Ex tb Db] [Ex pxb Db], I (M2) [Ex db Mb] |
| hardware fault tolerance according to IEC 61508 relating to ATEX                         | 0  |
| PFDavg with low demand rate according to IEC 61508 relating to ATEX                      | 0.008  |
| PFHD with high demand rate according to EN 62061 relating to ATEX                        | 5E-7 1/h   |
| Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX                     | SIL1   |
| T1 value for proof test interval or service life according to IEC 61508 relating to ATEX | 3 s  |

#### Certificates/ approvals

##### General Product Approval

[Confirmation](#)

| EMC | For use in hazardous locations | Declaration of Conformity | Test Certificates | Marine / Shipping |
|-----|--------------------------------|---------------------------|-------------------|-------------------|
|-----|--------------------------------|---------------------------|-------------------|-------------------|



IECEx

IECEx



EG-Konf.

[Type Test Certificates/Test Report](#)

|                   |       |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



LRS



PRS

[Confirmation](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5543-6HF14>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5543-6HF14>

Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5543-6HF14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RW5543-6HF14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5543-6HF14&lang=en)Characteristic: Tripping characteristics, I<sup>t</sup>t, Let-through current<https://support.industry.siemens.com/cs/ww/en/ps/3RW5543-6HF14/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5543-6HF14&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

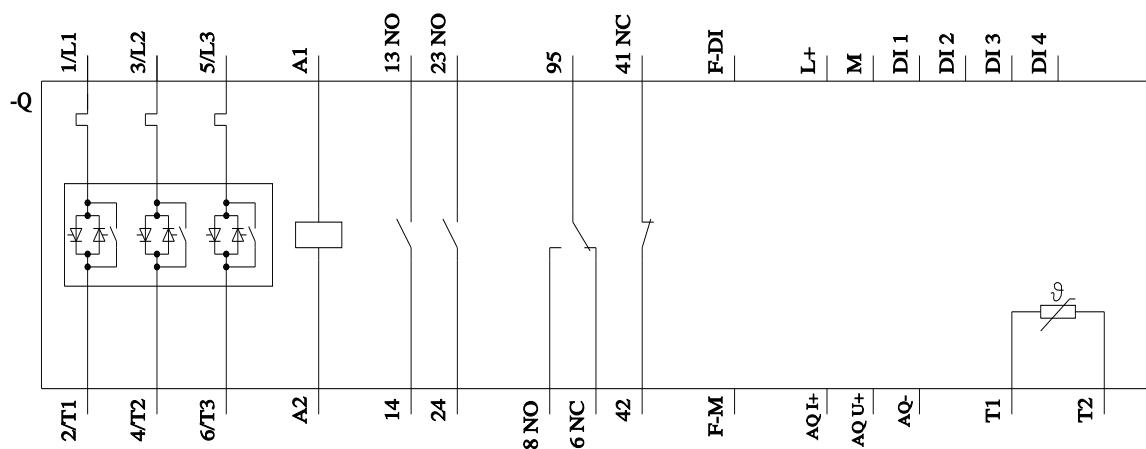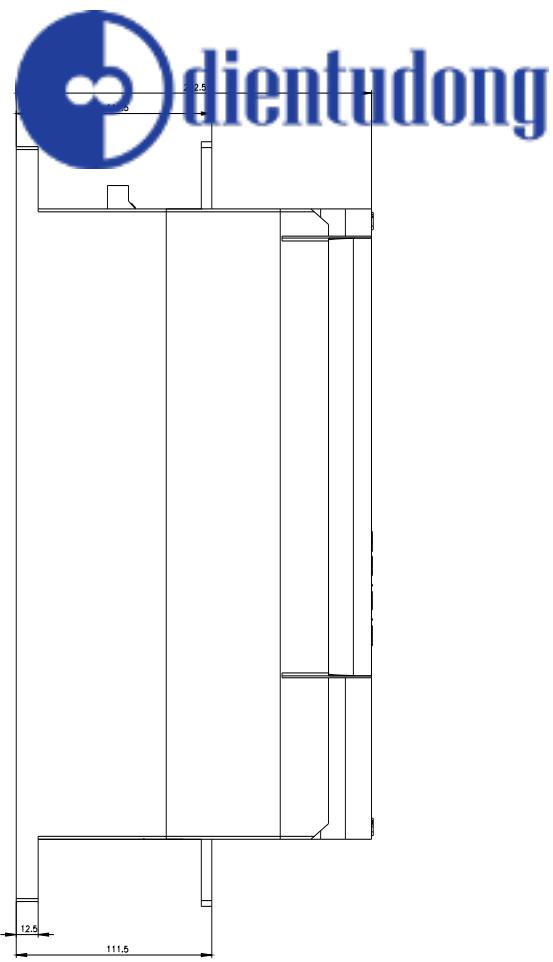



last modified:

5/13/2022 

