

Data sheet

3RW5558-6HA04



Figure similar

SIRIUS soft starter 200-480 V 1280 A, 24 V AC/DC Screw terminals

| | |
|---|--|
| product brand name | SIRIUS |
| product category | Hybrid switching devices |
| product designation | Soft starter |
| product type designation | 3RW55 |
| manufacturer's article number | |
| <ul style="list-style-type: none"> • of high feature HMI module usable • of communication module PROFINET standard usable • of communication module PROFINET high-feature usable • of communication module PROFIBUS usable • of communication module Modbus TCP usable • of communication module Modbus RTU usable • of communication module Ethernet/IP • of circuit breaker usable at 400 V • of circuit breaker usable at 500 V • of the gG fuse usable up to 690 V • of full range R fuse link for semiconductor protection usable up to 690 V • of back-up R fuse link for semiconductor protection usable up to 690 V | 3RW5980-0HF00 3RW5980-0CS00 3RW5950-0CH00 3RW5980-0CP00 3RW5980-0CT00 3RW5980-0CR00 3RW5980-0CE00 3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 3VA2716-7AB05-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10 3x3NA3365-6; Type of coordination 1, Iq = 65 kA 3NB3357-1KK26; Type of coordination 2, Iq = 65 kA 3x3NE3340-8; Type of coordination 2, Iq = 65 kA |
| General technical data | |
| starting voltage [%] | 20 ... 100 % |
| stopping voltage [%] | 50 %; non-adjustable |
| start-up ramp time of soft starter | 0 ... 360 s |
| ramp-down time of soft starter | 0 ... 360 s |
| start torque [%] | 10 ... 100 % |
| stopping torque [%] | 10 ... 100 % |
| torque limitation [%] | 20 ... 200 % |
| current limiting value [%] adjustable | 125 ... 800 % |
| breakaway voltage [%] adjustable | 40 ... 100 % |
| breakaway time adjustable | 0 ... 2 s |
| number of parameter sets | 3 |
| accuracy class according to IEC 61557-12 | 5 % |
| certificate of suitability | |
| <ul style="list-style-type: none"> • CE marking • UL approval • CSA approval | Yes Yes Yes |
| product component | |



- analog output
- programmable control inputs/outputs
- condition monitoring
- automatic parameterisation
- application wizards
- alternative run-down
- emergency operation mode
- reversing operation
- soft starting at heavy starting conditions

Yes; 4 ... 20 mA (dependent on ... 10 V
 Yes
 Yes
 Yes
 Yes
 Yes
 Yes
 Yes
 Yes

| Power Electronics | |
|---|--|
| operational current | |
| • at 40 °C rated value | 1 280 A |
| • at 40 °C rated value minimum | 256 A |
| • at 50 °C rated value | 1 139 A |
| • at 60 °C rated value | 1 030 A |
| operational current at inside-delta circuit | |
| • at 40 °C rated value | 2 217 A |
| • at 50 °C rated value | 1 973 A |
| • at 60 °C rated value | 1 784 A |
| operating voltage | |
| • rated value | 200 ... 480 V |
| • at inside-delta circuit rated value | 200 ... 480 V |
| relative negative tolerance of the operating voltage | -15 % |
| relative positive tolerance of the operating voltage | 10 % |
| relative negative tolerance of the operating voltage at inside-delta circuit | -15 % |
| relative positive tolerance of the operating voltage at inside-delta circuit | 10 % |
| operating power for 3-phase motors | |
| • at 230 V at 40 °C rated value | 400 kW |
| • at 230 V at inside-delta circuit at 40 °C rated value | 710 kW |
| • at 400 V at 40 °C rated value | 710 kW |
| • at 400 V at inside-delta circuit at 40 °C rated value | 1 200 kW |
| Operating frequency 1 rated value | 50 Hz |
| Operating frequency 2 rated value | 60 Hz |
| relative negative tolerance of the operating frequency | -10 % |
| relative positive tolerance of the operating frequency | 10 % |
| minimum load [%] | 10 %; Relative to set le |
| power loss [W] for rated value of the current at AC | |
| • at 40 °C after startup | 384 W |
| • at 50 °C after startup | 337 W |
| • at 60 °C after startup | 275 W |
| power loss [W] at AC at current limitation 350 % | |
| • at 40 °C during startup | 23 279 W |
| • at 50 °C during startup | 19 496 W |
| • at 60 °C during startup | 16 778 W |
| type of the motor protection | Electronic, tripping in the event of thermal overload of the motor |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 24 V |
| • at 60 Hz rated value | 24 V |
| relative negative tolerance of the control supply voltage at AC at 50 Hz | -20 % |
| relative positive tolerance of the control supply voltage at AC at 50 Hz | 20 % |
| relative negative tolerance of the control supply voltage at AC at 60 Hz | -20 % |
| relative positive tolerance of the control supply voltage at AC at 60 Hz | 20 % |
| control supply voltage frequency | 50 ... 60 Hz |



| | |
|--|--|
| relative negative tolerance of the control supply voltage frequency | -10 % |
| relative positive tolerance of the control supply voltage frequency | 10 % |
| control supply voltage | |
| • at DC rated value | 24 V |
| relative negative tolerance of the control supply voltage at DC | -20 % |
| relative positive tolerance of the control supply voltage at DC | 20 % |
| control supply current in standby mode rated value | 440 mA |
| holding current in bypass operation rated value | 1 100 mA |
| locked-rotor current at close of bypass contact maximum | 6.7 A |
| inrush current peak at application of control supply voltage maximum | 7.5 A |
| duration of inrush current peak at application of control supply voltage | 20 ms |
| design of the overvoltage protection | Varistor |
| design of short-circuit protection for control circuit | 4 A gG fuse (I _{cu} =1 kA), 6 A quick-acting fuse (I _{cu} =1 kA), C1 miniature circuit breaker (I _{cu} = 600 A), C6 miniature circuit breaker (I _{cu} = 300 A); Is not part of scope of supply |

Inputs/ Outputs

| | |
|---|---|
| number of digital inputs | 4 |
| • parameterizable | 4 |
| • number of digital outputs | 4 |
| • number of digital outputs parameterizable | 3 |
| • number of digital outputs not parameterizable | 1 |
| digital output version | 3 normally-open contacts (NO) / 1 changeover contact (CO) |
| number of analog outputs | 1 |
| switching capacity current of the relay outputs | |
| • at AC-15 at 250 V rated value | 3 A |
| • at DC-13 at 24 V rated value | 1 A |

Installation/ mounting/ dimensions

| | |
|---|--|
| mounting position | Vertical (can be rotated +/- 90° and tilted forward or backward +/- 22.5°) |
| fastening method | screw fixing |
| height | 764 mm |
| width | 478 mm |
| depth | 241 mm |
| required spacing with side-by-side mounting | |
| • forwards | 10 mm |
| • backwards | 0 mm |
| • upwards | 100 mm |
| • downwards | 75 mm |
| • at the side | 5 mm |
| weight without packaging | 61 kg |

Connections/ Terminals

| | |
|--|--|
| type of electrical connection | |
| • for main current circuit | busbar connection |
| • for control circuit | screw-type terminals |
| width of connection bar maximum | 55 mm |
| wire length for thermistor connection | |
| • with conductor cross-section = 0.5 mm ² maximum | 50 m |
| • with conductor cross-section = 1.5 mm ² maximum | 150 m |
| • with conductor cross-section = 2.5 mm ² maximum | 250 m |
| type of connectable conductor cross-sections | |
| • for DIN cable lug for main contacts stranded | 2x (50 ... 240 mm ²) |
| • for DIN cable lug for main contacts finely stranded | 2x (70 ... 240 mm ²) |
| type of connectable conductor cross-sections | |
| • for control circuit solid | 1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) |
| • for control circuit finely stranded with core end processing | 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²) |



| | |
|--|---|
| <ul style="list-style-type: none"> at AWG cables for control circuit solid | 1x (20 ... 12), 2x (20 ... 12) |
| wire length | |
| <ul style="list-style-type: none"> between soft starter and motor maximum at the digital inputs at DC maximum | 800 m 1 000 m |
| tightening torque | |
| <ul style="list-style-type: none"> for main contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals | 20 ... 35 N·m 0.8 ... 1.2 N·m |
| tightening torque [lbf·in] | |
| <ul style="list-style-type: none"> for main contacts with screw-type terminals for auxiliary and control contacts with screw-type terminals | 177 ... 310 lbf·in 7 ... 10.3 lbf·in |
| Ambient conditions | |
| installation altitude at height above sea level maximum | 5 000 m; Derating as of 1000 m, see catalog |
| ambient temperature | |
| <ul style="list-style-type: none"> during operation during storage and transport | -25 ... +60 °C; Please observe derating at temperatures of 40 °C or above -40 ... +80 °C |
| environmental category | |
| <ul style="list-style-type: none"> during operation according to IEC 60721 during storage according to IEC 60721 during transport according to IEC 60721 | 3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4 2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m) |
| EMC emitted interference | acc. to IEC 60947-4-2: Class A |
| Communication/ Protocol | |
| communication module is supported | |
| <ul style="list-style-type: none"> PROFINET standard PROFINET high-feature EtherNet/IP Modbus RTU Modbus TCP PROFIBUS | Yes Yes Yes Yes Yes Yes |
| UL/CSA ratings | |
| manufacturer's article number | |
| <ul style="list-style-type: none"> of the fuse <ul style="list-style-type: none"> usable for Standard Faults up to 575/600 V according to UL usable for High Faults up to 575/600 V according to UL usable for Standard Faults at inside-delta circuit up to 575/600 V according to UL usable for High Faults at inside-delta circuit up to 575/600 V according to UL | Type: Class J / L, max. 3000 A; Iq = 85 kA Type: Class J / L, max. 3000 A; Iq = 100 kA Type: Class J / L, max. 3000 A; Iq = 85 kA Type: Class J / L, max. 3000 A; Iq = 100 kA |
| operating power [hp] for 3-phase motors | |
| <ul style="list-style-type: none"> at 200/208 V at 50 °C rated value at 220/230 V at 50 °C rated value at 460/480 V at 50 °C rated value at 200/208 V at inside-delta circuit at 50 °C rated value at 220/230 V at inside-delta circuit at 50 °C rated value at 460/480 V at inside-delta circuit at 50 °C rated value | 400 hp 450 hp 1 000 hp 700 hp 850 hp 1 700 hp |
| contact rating of auxiliary contacts according to UL | R300-B300 |
| Safety related data | |
| protection class IP on the front according to IEC 60529 | IP00 |
| electromagnetic compatibility | acc. to IEC 60947-4-2 |
| ATEX | |
| certificate of suitability | |
| <ul style="list-style-type: none"> ATEX | Yes |



| | |
|---|---|
| <ul style="list-style-type: none"> • IECEx • according to ATEX directive 2014/34/EU | Yes BVS 18 ATEX F 00 |
| type of protection according to ATEX directive 2014/34/EU | II (2)G [Ex eb Gb] [Ex pb Gb], I (2)D [Ex b Db] [Ex pb Db] I (M2) [Ex db Mb] |
| hardware fault tolerance according to IEC 61508 relating to ATEX | 0 |
| PFDavg with low demand rate according to IEC 61508 relating to ATEX | 0.008 |
| PFHD with high demand rate according to EN 62061 relating to ATEX | 5E-7 1/h |
| Safety Integrity Level (SIL) according to IEC 61508 relating to ATEX | SIL1 |
| T1 value for proof test interval or service life according to IEC 61508 relating to ATEX | 3 s |

Certificates/ approvals

| | |
|---------------------------------|------------|
| General Product Approval | EMC |
|---------------------------------|------------|



[Confirmation](#)



| | | | |
|---------------------------------------|----------------------------------|--------------------------|--------------------------|
| For use in hazardous locations | Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------------------|----------------------------------|--------------------------|--------------------------|



[Type Test Certificates/Test Report](#)



| | |
|--------------------------|--------------|
| Marine / Shipping | other |
|--------------------------|--------------|



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5558-6HA04>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5558-6HA04>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW5558-6HA04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5558-6HA04&lang=en

Characteristic: Tripping characteristics, I_t, Let-through current




<https://support.industry.siemens.com/cs/ww/en/ps/3RW5558-6HA04/char>

Characteristic: Installation altitude

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5558-6HA04&objecttype=14&gridview=view1>

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

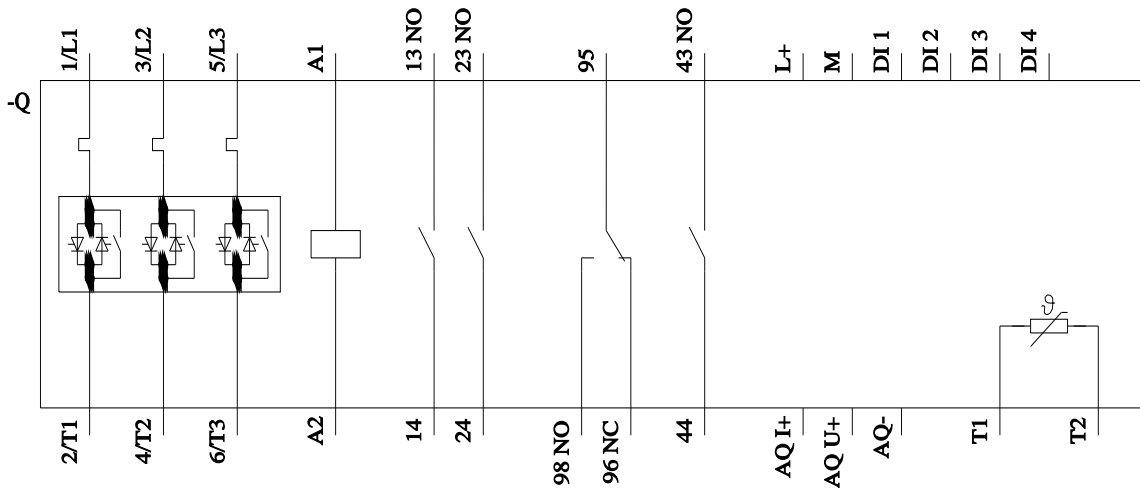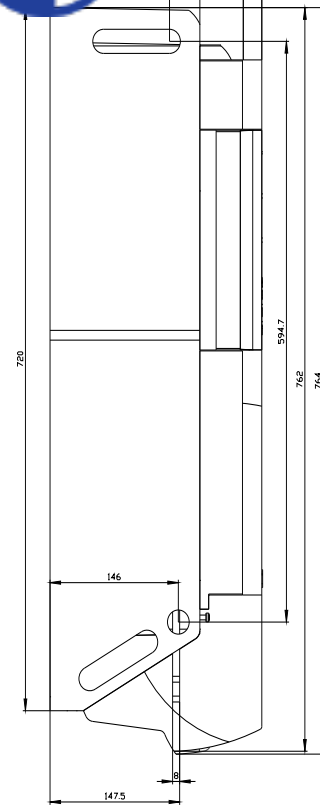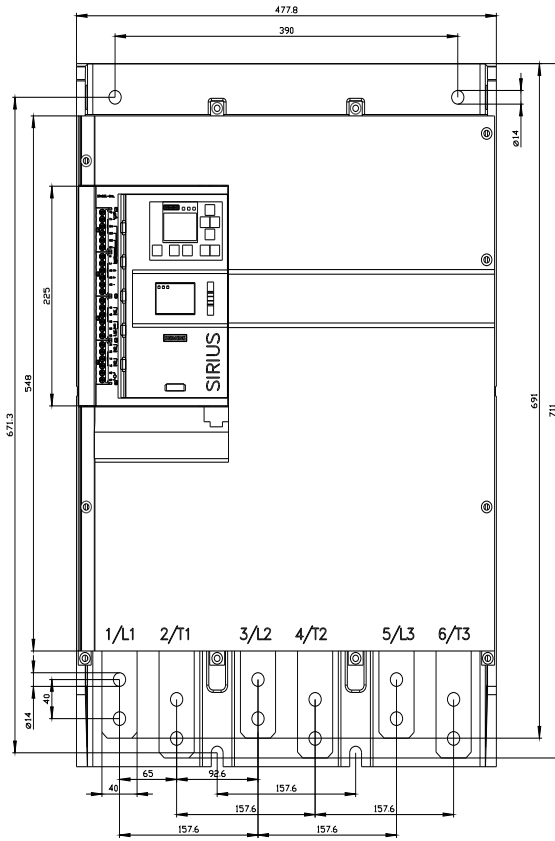



last modified:

5/13/2022 